


# Kodak K9V Alkaline Battery

Effective: April 11, 2008

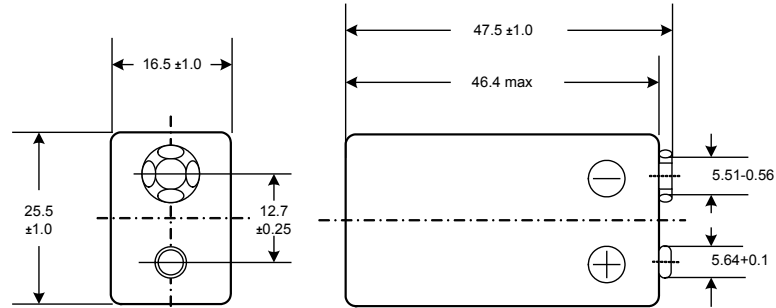

Dimensions are in millimeters and include label.

<b>System:</b>	<b>Alkaline</b>
<b>Designation:</b>	<b>ANSI 1604A, IEC 6LR61</b>
<b>Nominal Voltage:</b>	<b>9.0 Volts</b>
<b>Nominal Capacity:</b>	<b>570 mAh at 620 Ohms to 4.8 Volts</b>
<b>Internal Impedance:</b>	<b>2.76 Ohms (typical)</b>
<b>Temperature Ranges:</b>	<b>-20°C to +54°C (Operating)</b> <b>+10°C to +25°C (Storage, Recommended)</b>
<b>Chemistry:</b>	<b>Zn/MnO<sub>2</sub></b>
<b>Reaction:</b>	<b>2MnO + Zn + H<sub>2</sub>O → 2MnOOH + ZnO</b>
<b>Average Weight:</b>	<b>45 grams</b>
<b>Volume:</b>	<b>21.8 cm<sup>3</sup></b>
<b>Terminals:</b>	<b>Miniature Snap</b>
<b>Jacket:</b>	<b>Metal Litho or PVC Plastic Label</b>

**Note:**

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424

[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)


© Eastman Kodak Company, 2008

Kodak is a trademark.

The Kodak logo, featuring the word "Kodak" in a bold, red, sans-serif font.

# Kodak KAA Alkaline Battery

Effective: April 10, 2008

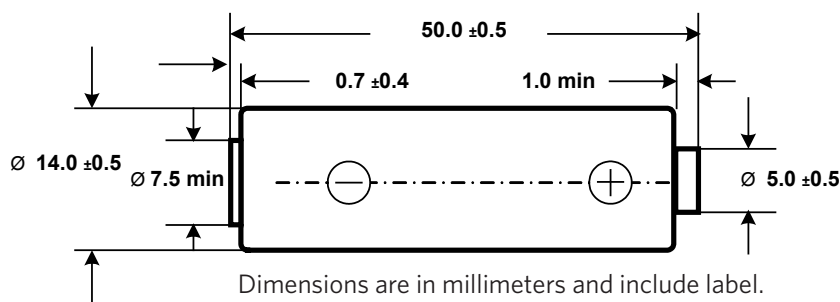

<b>System:</b>	<b>Alkaline</b>
<b>Designation:</b>	<b>ANSI 15A, IEC LR6</b>
<b>Nominal Voltage:</b>	<b>1.5 Volts</b>
<b>Nominal Capacity:</b>	<b>2900 mAh at 75 Ohms to 0.8 Volts</b>
<b>Internal Impedance:</b>	<b>0.10 Ohms (typical)</b>
<b>Temperature Ranges:</b>	<b>-20°C to +54°C (Operating)</b> <b>+10°C to +25°C (Storage, Recommended)</b>
<b>Chemistry:</b>	<b>Zn/MnO<sub>2</sub></b>
<b>Reaction:</b>	<b>2MnO + Zn + H<sub>2</sub>O → 2MnOOH + ZnO</b>
<b>Average Weight:</b>	<b>23.0 grams</b>
<b>Volume:</b>	<b>8.0 cm<sup>3</sup></b>
<b>Terminals:</b>	<b>Flat contacts, Protruding Negative</b>
<b>Jacket:</b>	<b>PVC Plastic Label</b>

**Note:**

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.9999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424

[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)


© Eastman Kodak Company, 2008

Kodak is a trademark.

**Kodak**

# Kodak KC Alkaline Battery

Effective: April 11, 2008

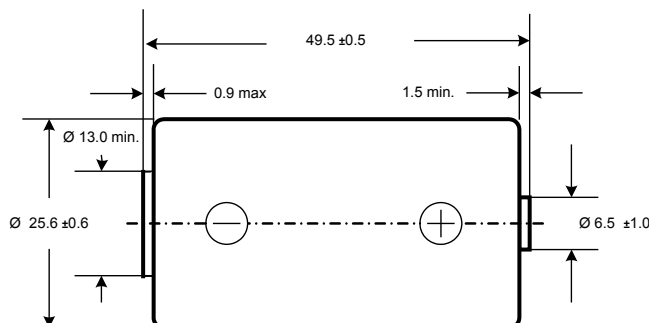

Dimensions are in millimeters and include label.

<b>System:</b>	<b>Alkaline</b>
<b>Designation:</b>	<b>ANSI 14A, IEC LR14</b>
<b>Nominal Voltage:</b>	<b>1.5 Volts</b>
<b>Nominal Capacity:</b>	<b>8400 mAh at 39 Ohms to 0.8 Volts</b>
<b>Internal Impedance:</b>	<b>0.10 Ohms (typical)</b>
<b>Temperature Ranges:</b>	<b>-20°C to +54°C (Operating)</b> <b>+10°C to +25°C (Storage, Recommended)</b>
<b>Chemistry:</b>	<b>Zn/MnO<sub>2</sub></b>
<b>Reaction:</b>	<b>2MnO + Zn + H<sub>2</sub>O → 2MnOOH + ZnO</b>
<b>Average Weight:</b>	<b>70 grams</b>
<b>Volume:</b>	<b>26.6 cm<sup>3</sup></b>
<b>Terminals:</b>	<b>Flat contacts, Protruding Negative</b>
<b>Jacket:</b>	<b>PVC Plastic Label</b>

**Note:**

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424

© Eastman Kodak Company, 2008


[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)

Kodak is a trademark.

**Kodak**

# Kodak KD Alkaline Battery

Effective: April 11, 2008

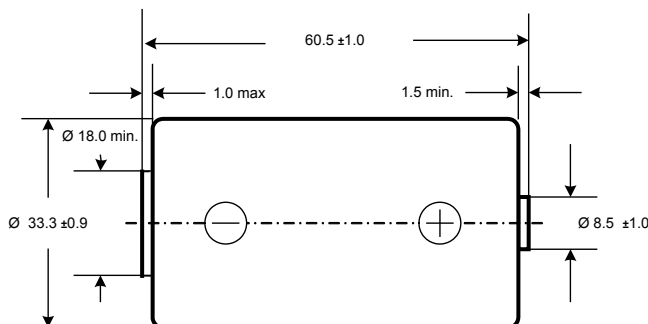

Dimensions are in millimeters and include label.

<b>System:</b>	<b>Alkaline</b>
<b>Designation:</b>	<b>ANSI 13A, IEC LR20</b>
<b>Nominal Voltage:</b>	<b>1.5 Volts</b>
<b>Nominal Capacity:</b>	<b>19500 mAh at 39 Ohms to 0.8 Volts</b>
<b>Internal Impedance:</b>	<b>0.08 Ohms (typical)</b>
<b>Temperature Ranges:</b>	<b>-20°C to +54°C (Operating)</b> <b>+10°C to +25°C (Storage, Recommended)</b>
<b>Chemistry:</b>	<b>Zn/MnO<sub>2</sub></b>
<b>Reaction:</b>	<b>2MnO + Zn + H<sub>2</sub>O → 2MnOOH + ZnO</b>
<b>Average Weight:</b>	<b>141 grams</b>
<b>Volume:</b>	<b>53.8 cm<sup>3</sup></b>
<b>Terminals:</b>	<b>Flat contacts, Protruding Negative</b>
<b>Jacket:</b>	<b>PVC Plastic Label</b>

**Note:**

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.9999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424

[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)


© Eastman Kodak Company, 2008

Kodak is a trademark.

**Kodak**

# Kodak K3A Alkaline Battery

Effective: April 11, 2008

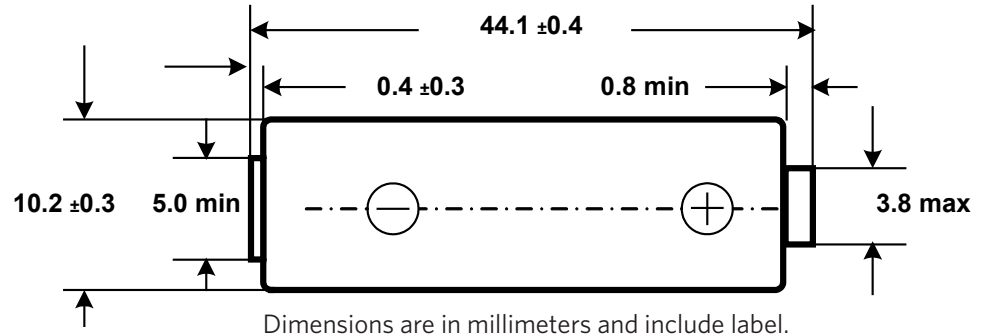

<b>System:</b>	<b>Alkaline</b>
<b>Designation:</b>	<b>ANSI 24A, IEC LR03</b>
<b>Nominal Voltage:</b>	<b>1.5 Volts</b>
<b>Nominal Capacity:</b>	<b>1250 mAh at 75 Ohms to 0.8 Volts</b>
<b>Internal Impedance:</b>	<b>0.14 Ohms (typical)</b>
<b>Temperature Ranges:</b>	<b>-20°C to +54°C (Operating)</b> <b>+10°C to +25°C (Storage, Recommended)</b>
<b>Chemistry:</b>	<b>Zn/MnO<sub>2</sub></b>
<b>Reaction:</b>	<b>2MnO + Zn + H<sub>2</sub>O → 2MnOOH + ZnO</b>
<b>Average Weight:</b>	<b>11.4 grams</b>
<b>Volume:</b>	<b>3.8 cm<sup>3</sup></b>
<b>Terminals:</b>	<b>Flat contacts, Protruding Negative</b>
<b>Jacket:</b>	<b>PVC Plastic Label</b>

**Note:**

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) Batteries are NOT subject to European RoHS regulations.
- 7) Primary Batteries (non-Rechargeable) are not subject to China RoHS regulations.
- 8) MSDS sheets are available on the Kodak website.

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811, Phone 1-800-242-2424

[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)

© Eastman Kodak Company, 2008

Kodak is a trademark.

**Kodak**